

Innovativeness

- + One charger with two output sockets
- + Business use with intelligent App control
- + Vandal resistant and anti-corrosion

Secure and Safe


- + RCD Type A and 6mA DC residual current protection
- + MID certified energy meter with accurate measurement

Intelligent Control


- + Ethernet/4G/Wi-Fi communication all supported
- + OCPP communication protocol with CMS
- + Intelligent operation by App and cashless payment

Flexible Option

- + App operation or RFID authentication or plug and play
- + Customization with different color painting

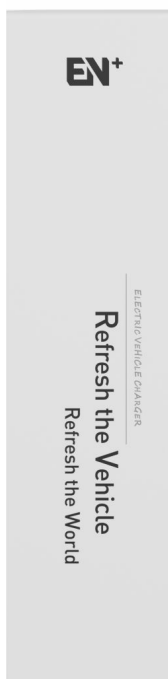

Front

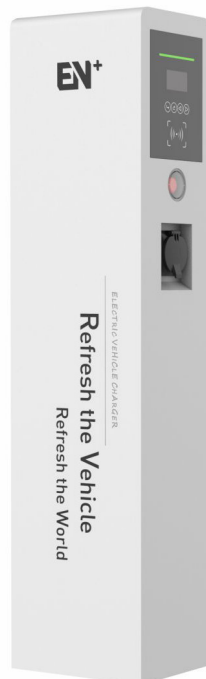

Side



Back



DATASHEET	MODEL	AC014K-BE-24	AC044K-BE-24	
Input	Power Supply	1P+N+PE	3P+N+PE	
	Rated Voltage	230V AC	400V AC	
	Rated Current	64A	64A	
	Frequency	50/60Hz	50/60Hz	
Output	Output Voltage	230V AC	400V AC	
	Maximum Current	2x32A	2x32A	
	Rated Power	2x7kW	2x22kW	
User Interface	Charge Connector	Type 2 cable		
	Enclosure	Galvanized steel		
	Left/Right Panel	Temper glass		
	LED Indicator	Green/Yellow/Red		
	LCD Display	2.7" black & white screen		
	RFID Reader	Mifare ISO/IEC 14443 A		
	Start Mode	Plug&Play/RFID card/App		
	Emergency Stop	No		
Communication	Wi-Fi	Yes		
	Ethernet	Yes		
	3G/4G	Yes		
	OCPP	OCPP 1.6 Json (OCPP 2.0 optional)		
Safety	Energy Meter	MID certified		
	RCD	30mA Type A + 6mA DC		
	Ingress Protection	IP54		
	Impact Protection	IK08		
	Electrical Protection	Over current protection, Residual current protection, Short circuit protection, Ground protection, Surge protection, Over/Under voltage protection, Over/Under frequency protection, Over/Under temperature protection		
	Certification	CE		
	Certification Standard	EN/IEC 61851-1: 2017, EN/IEC 61851-21-2: 2018		
	Warranty	2 years		
	Environment	Installation	Floor-stand	
		Work Temperature	-30°C-+50°C	
Work Humidity		5%-95%		
Work Altitude		<2000m		
Package	Product Dimension	1200 x 290 x 230mm (H*W*D)		
	Package Dimension	1320 x 480 x 430mm (L*W*H)		
	Net Weight	25.5kg		
	Gross Weight	45kg		
	External Package	Wood case		

